





Inter-Changeable Points Live Center

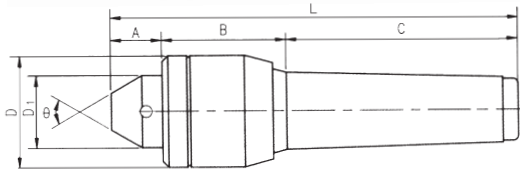

- Complete set with 7 Interchangeable Points for various processing.
- Packed in plastic case.
- Accurting high accuracy and durability as well as complete rust-proof performance
- Body mabe of SCM-4 special tool steel hardened and ground can be used for heavy duty work.

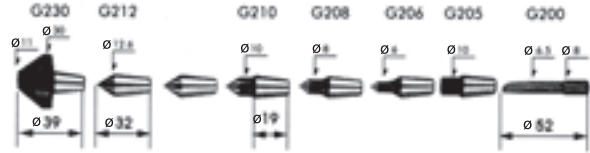


Unit:mm

ORDER NO.	TYPE	A	B	C	D	D1	b	L	d1	Accuracy	Speed Max	θ	G.W. weight kgs	PACKING LxWxH	CODE NO.
VLC-312	MT2	22	36	69	32	25	-	127	-	0.008	4000RPM	60°	0.85kgs	166 x 105 x 63	5001-040
VLC-313	MT3	23	44	86	41	30	-	153	-	0.008	3000RPM	60°	1.4 kgs	255 x 138 x 100	5001-041
VLC-314	MT4	23	51	108	47	32	-	182	-	0.008	2500RPM	60°	1.92kgs	255 x 138 x 100	5001-042




High Speed NC Interchangeable Points Live Center

Water-Proof Type

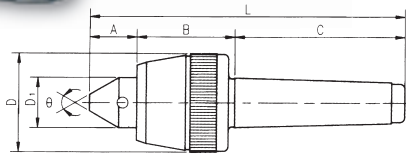


1. Center shaft is made of SKS3 material under vacuum heating treatment to provide higher rigidity (HRC60°+2°) and satisfied wear-resistance.
2. Center is constituted by dual ball bearing. Thrust bearing & needle roller bearing assembly.
3. Applicable to high-speed leathe & NC leathe with heavy load water-proof.

VCS-MT3,MT4



VCS-MT4P,MT5P

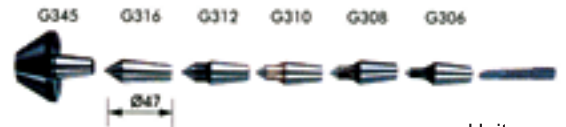


Unit:mm

ORDER NO.	A	B	C	D	D1	b	L	d1	Accuracy	Speed Max	θ	G.W. weight kgs	PACKING LxWxH	CODE NO.
VCS-MT3	28	55	86	53	30	-	167	-	0.008	4000RPM	60°	1.8 kgs	255 x 138 x 100	5001-050
VCS-MT4	30	62	108	63	32	-	196	-	0.008	3500RPM	60°	2.53kgs	255 x 138 x 100	5001-051
VCS-MT4P	30	62	108	63	32	-	196	-	0.008	3500RPM	60°	2.4 kgs	235 x 130 x 80	5001-052
VCS-MT5P	34	71	136	83	40	-	237	-	0.008	2500RPM	60°	5 kgs	275 x 147 x 97	5001-053



High Load Interchangeable Point Live Center

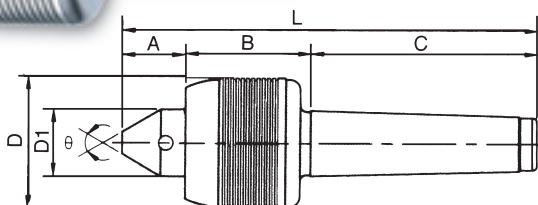

1. Shaft uses material SKD11:through vacuum heat tretment, it is even more durale, hardness is as high as (HRC60°±2°)and satisfied wear-resistance. Main body is made of SCM21 material.
2. Front end is constituted by skf anguar contact ball bearing & thrust ball bearing. middle & rear ends are comprised of needle roller bearing assembly.
3. These centers are suitable for NC leathe at high-speed & heavy-load operation, water-proof.



Unit:mm

ORDER NO.	A	B	C	D	D1	b	L	d1	Accuracy	Speed Max	θ	G.W. weight kgs	PACKING LxWxH	CODE NO.
VCP-MT4	35	60	108	68	32	-	203	-	0.005	4500RPM	60°	2.76 kgs	235 x 130 x 80	5001-060
VCP-MT5	37	70	136	87	40	-	243	-	0.005	3000RPM	60°	5 kgs	275 x 147 x 97	5001-061