



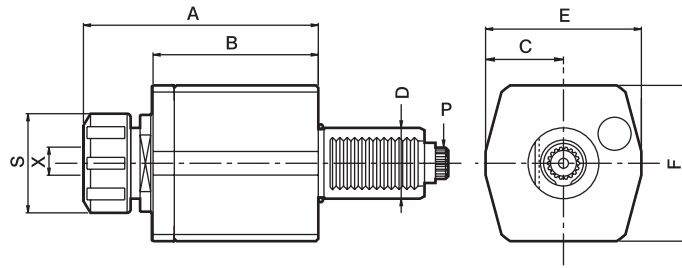

# Axial Drilling And Milling Heads

TYPE DIN 5480



Power Transmission According To DIN 5480

- External coolant supply
- To be used for collet DIN 6499
- Collet is not included.

## DIMENSIONS

Order No.	D DIN 69880	X Capacity	S	Maximum R.P.M.	i	A	B	C	E	F	P DIN 5480	CODE NO.
DA30548025	30	1-16 ER25	42	6000	1:1	101	70	33	66	66	W16X0.8	5006-037
DA40548032	40	2-20 ER32	50	6000	1:1	89	55	39	79	78	W20X0.8	5006-038

# Axial Tapping Heads

DIN 5480


## DIMENSIONS

Order No.	D DIN 69880	X Capacity	S	Maximum R.P.M.	i	A	B	C	E	F	P DIN 5480	CODE NO.
TDA30548025	30	1-10 ER16	32	3000	1:1	115	70	33	66	66	W16X0.8	5006-039
TDA40548032	40	1-13 ER20	35	3000	1:1	120	55	39	79	78	W20X0.8	5006-040



# Axial Milling Heads

TYPE DIN 5480

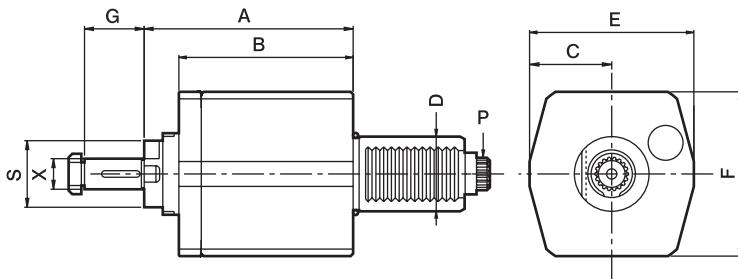

- To be used for cutter arbor according to DIN 6358
- External coolant and intermediate rings supply.

## DIMENSIONS

Order No.	D DIN 69880	X DIN 6358	S	Maximum R.P.M.	i	A	B	C	E	F	G	P DIN 5480	CODE NO.
DA30548016C	30	16	32	3000	1:1	91.5	70	33	66	66	27	W16X0.8	5006-041
DA40548016C	40	16	32	3000	1:1	68.5	55	39	79	78	27	W20X0.8	5006-042
DA40548022C	40	22	32	3000	1:1	68.5	55	39	79	78	31	W20X0.8	5006-043