



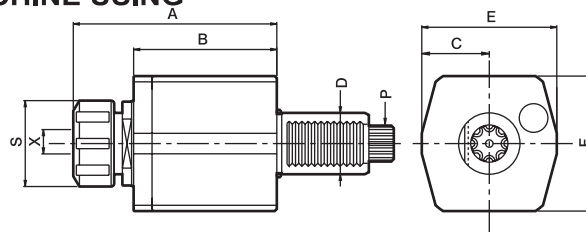

# Axial Drilling And Milling Heads

TYPE DIN 5482

FOR DIN 5482 MACHINE USING



- External coolant supply
- To be used for collet DIN 6499
- Collet is not included.

Power Transmission According To DIN 5482

## DIMENSIONS

Order No.	D DIN 69880	X Capacity	S	Maximum R.P.M.	i	A	B	C	E	F	P DIN 5482	CODE NO.
DA30548225	30	1-16 ER25	42	6000	1:1	101	70	33	66	66	B15X12	5006-066
DA40548232	40	2-20 ER32	50	6000	1:1	89	55	39	79	78	B17X14	5006-067
DA50548240	50	3-26 ER40	63	6000	1:1	128	85	40	84	88	B20X17	5006-068
DA60548250	60	10-34 ER50	78	6000	1:1	154	98	52	104	104	B25X22	5006-069

# Axial Tapping Heads

DIN 5482


## DIMENSIONS

Order No.	D DIN 69880	X Capacity	S	Maximum R.P.M.	i	A	B	C	E	F	P DIN 5482	CODE NO.
TDA30548216	30	1-10 ER16	32	3000	1:1	115	70	33	66	66	B15X12	5006-070
TDA40548220	40	1-13 ER20	35	3000	1:1	120	55	39	79	78	B17X14	5006-071
TDA50548225	50	1-16 ER25	42	3000	1:1	133	85	40	84	88	B20X17	5006-072
TDA60548232	60	2-20 ER32	50	3000	1:1	147	98	52	104	104	B25X22	5006-073



# Axial Milling Heads

TYPE DIN 5482

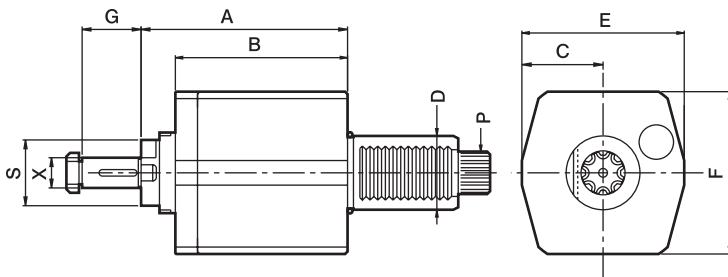

- External coolant and intermediate rings supply.
- To be used for cutter arbor according to DIN 6358

## DIMENSIONS

Order No.	D DIN 69880	X DIN 6358	S	Maximum R.P.M.	i	A	B	C	E	F	G	P DIN 5482	CODE NO.
DA30548216C	30	16	32	3000	1:1	91.5	70	33	66	66	27	B15X12	5006-074
DA40548216C	40	16	32	3000	1:1	68.5	55	39	79	78	27	B17X14	5006-075
DA40548222C	40	22	32	3000	1:1	68.5	55	39	79	78	31	B17X14	5006-076
DA50548222C	50	22	40	3000	1:1	117	85	40	84	88	31	B20X17	5006-077
DA50548227C	50	27	40	3000	1:1	117	85	40	84	88	33	B20X17	5006-078