





Radial Drilling And Milling Heads-Backwards

TYPE SPUR COUPLING-MT

MODE: BL
LEFT-HAND

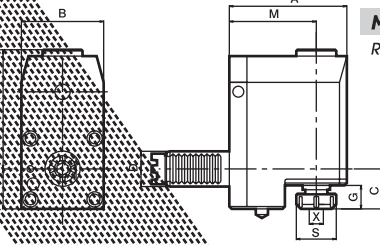

MODE: BR
RIGHT-HAND

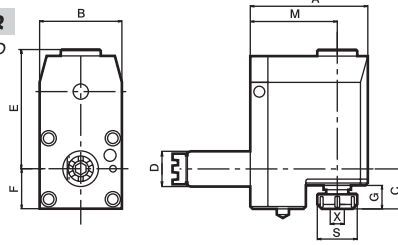

SET BACK

- External coolant supply
- To be used for collet DIN 6499
- Collet is not included.

DIMENSIONS

Order No.	D DIN 69880	X Capacity	S	Maximum R.P.M.	i	A	B	C	E	F	G	M	CODE NO.
BR20MT1657 BL20MT1657	20	1-10 ER16	32	5000	1:1	80	50	43	63	27	29	57	5006-115
BR30MT2569 BL30MT2569	30	1-16 ER25	42	5000	1:1	95	60	42	76	32	29	69	5006-116
BR40MT3290 BL40MT3290	40	2-20 ER32	50	5000	1:1	124	80	44	110	42	34	90	5006-117
BR50MT4090 BL50MT4090	50	2-25 ER50	63	5000	1:1	129	86	45	112	45	39	90	5006-118

Radial Tapping Heads-Backwards

DIMENSIONS



Order No.	D DIN 69880	X Capacity	S	Maximum R.P.M.	i	A	B	C	E	F	G	M	CODE NO.
TBR30MT1669 TBL30MT1669	30	1-10 ER16	32	3000	1:1	95	80	44	76	32	32	69	5006-119
TBR40MT2090 TBL40MT2090	40	1-13 ER20	35	3000	1:1	124	80	50	110	42	34	90	5006-120
TBR50MT2590 TBL50MT2590	50	2-16 ER25	42	3000	1:1	129	86	54	112	45	36	90	5006-121





Radial Drilling And Milling Heads

TYPE SPUR COUPLING-MT

MODE: FL
LEFT-HAND



MODE: FR
RIGHT-HAND



- External coolant supply
- To be used for collet DIN 6499
- Collet is not included.

DIMENSIONS

Order No.	D DIN 69880	X Capacity	S	Maximum R.P.M.	i	A	B	C	F	G	M	CODE NO.
FR30MT2565 FL30MT2565	30	1-16 ER25	42	5000	1:1	97	64	74.5	41	26	65	5006-122
FR30MT2585 FL30MT2585	30	1-16 ER25	42	5000	1:1	117	64	74.5	41	26	85	5006-123
FR40MT3265 FL40MT3265	40	2-20 ER32	50	5000	1:1	99	80	71	40	23	65	5006-124
FR40MT3285 FL40MT3285	40	2-20 ER32	50	5000	1:1	119	80	71	40	23	85	5006-125
FR40MT32100 FL40MT32100	40	2-20 ER32	50	5000	1:1	134	80	71	40	23	100	5006-126
FR50MT4075 FL50MT4075	50	3-26 ER40	60	5000	1:1	115	88	103	56	40	75	5006-127

Radial Tapping Heads

DIMENSIONS

Order No.	D DIN 69880	X Capacity	S	Maximum R.P.M.	i	A	B	C	F	G	M	CODE NO.
FR30MT1685 FL30MT1685	30	1-10 ER16	32	3000	1:1	97	64	75	41	30	65	5006-128
FR30MT1685 FL30MT1685	30	1-10 ER16	32	3000	1:1	117	64	75	41	30	85	5006-129
FR40MT2065 FL40MT2065	40	1-13 ER20	35	3000	1:1	99	80	70	40	25	65	5006-130
FR40MT2085 FL40MT2085	40	1-13 ER20	35	3000	1:1	119	80	70	40	25	85	5006-131
FR50MT2575 FL50MT2575	50	1-16 ER25	42	3000	1:1	115	88	103	56	42	75	5006-132